


Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3
 Ph: (587) 775-7777
 www.spirasystems.com

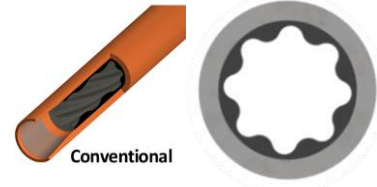

Stator Specifications	
	Inches
Overall Length	200.0
Tube O.D.	6.60
Tube I.D. at Terminal	5.50
Rubber Cut Back Top	8.0
Rubber Cut Back Bottom	8.0
Weight (lb)	670
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
	Inches
Overall Length	194.0
Contour Length	188.0
Major Diameter	4.316
Eccentricity	0.288
Head Diameter	4.000
Gunbored Weight (lb)	440
Solid Weight (lb)	611
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (GPM)	300 - 600
Speed Range (RPM)	90 - 175
Torque Slope (ft-lbs/psi)	8.313
Rotation (rev/Gal)	0.292
Stall Torque (ft-lbs)	14,650
Operating Parameters	
Max Diff Pressure (psi)	1,200
Torque (ft-lbs)	9,750
Flow Rate (GPM)	600
Full Load RPM	128 at 600 GPM


Minor Diameter Fit Details (at 68°F)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp
	Vector Measurements		True Size Laser Measurements		Optimal
1.0T	-	-	-	-	-
0.5T	0.010	3.730	0.017	3.723	90 - 175 °F
STD	0.000	3.740	0.007	3.733	115 - 200 °F
0.5L	-0.010	3.750	-0.003	3.743	140 - 225 °F
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°F)					0.00039

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.


*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

**Negative fits indicate clearance fit at room temperature using nominal new rotor

***Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

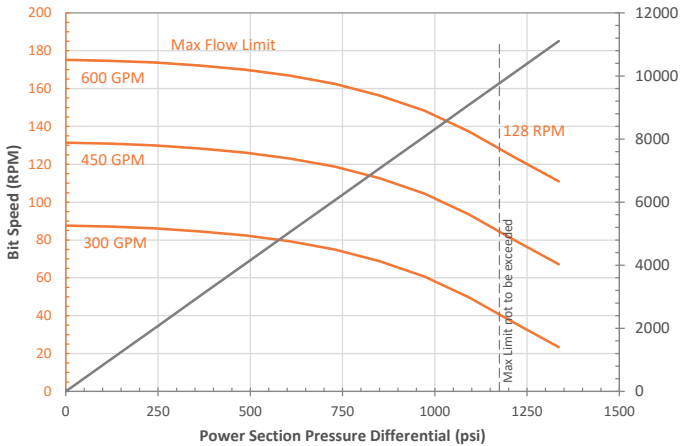

----- Expected slightly reduced torque when operating at this flow limit
 - - - - - Expect reduced life when operating at this pressure limit for extended periods of time

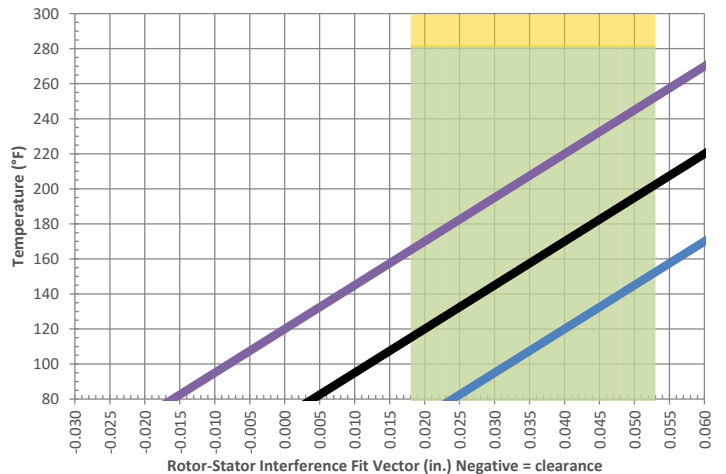

1. Choose desired operating temperature
2. Read across to middle of shaded region
3. Follow **slope** down to room temperature to determine which fit to order

Acceptable Fit at Reduced Diff
 Optimal Operating Fit Range
 1L Size Band
 STD Size Band
 1T Size Band

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit www.spirasystems.com for most up to date information.