


## Power Sections

22 East Lake Crescent N.E., Airdrie, Alberta, Canada, T4A 2H3  
Ph: (587) 775-7777  
www.spirasystems.com

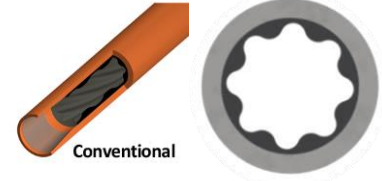

Stator Specifications	
Overall Length (in.)	200.0 [5080 mm]
Tube O.D. (in.)	6.60 [168 mm]
Tube I.D. at Terminal (in.)	5.50 [140 mm]
Rubber Cut Back Top (in.)	8.0
Rubber Cut Back Bott (in.)	8.0
Weight (kg)	305
Tube Material	4140-4145
To be threaded and ID Banded by customer	

Rotor Specifications	
Overall Length (in.)	194.0 [4928 mm]
Contour Length (in.)	188 [4775 mm]
Major Diameter (in.)	4.316
Eccentricity (in.)	0.288
Head Diameter (in.)	4.000
Bored Weight (kg)	200
Solid Weight (kg)	277
Material	17-4PH
Coating option 1	Chrome
Coating option 2	Carbide
To be threaded by customer	

Performance Specifications	
Flow Range (lpm)	1100 - 2250
Speed Range (RPM)	85 - 175
Torque Slope (ft-lb/kPa)	1.206
Rotation (rev/l)	0.077
Stall Torque (ft-lb)	14,650
Operating Parameters	
Max Diff Pressure (kPa)	8,100
Torque (ft-lb)	9,750
Flow Rate (lpm)	2,250
Full Load RPM	127 at 2250 lpm



Minor Diameter Fit Details (at 20°C)					
Size Band	Nominal Fit (in.)**	Minor Dia (in.)*	Nominal Fit (in.)**	Minor Dia (in.)*	Operating Temp
	Vector Measurements		True Size Laser Measurements		Optimal
1.0T	-	-	-	-	-
0.5T	0.010	3.730	0.017	3.723	30 - 80 °C
STD	0.000	3.740	0.007	3.733	45 - 95 °C
0.5L	-0.010	3.750	-0.003	3.743	60 - 110 °C
1.0L	-	-	-	-	-
1.5L	-	-	-	-	-
2.0L	-	-	-	-	-
Minor Shrinkage (in./°C)					0.00071

All default tolerances are +/- 0.015 unless otherwise explicitly agreed upon with Spira Systems. Call for availability of sizes not listed.

\*Approximate Vector/laser gauge conversion: 0.007 ± 0.005

\*\*Negative fits indicate clearance fit at room temperature using nominal new rotor

\*\*\*Best operating temperatures are based on new stators subject to normal thermal expansion conditions. Operators may wish to consider swell and run life when selecting sizes.

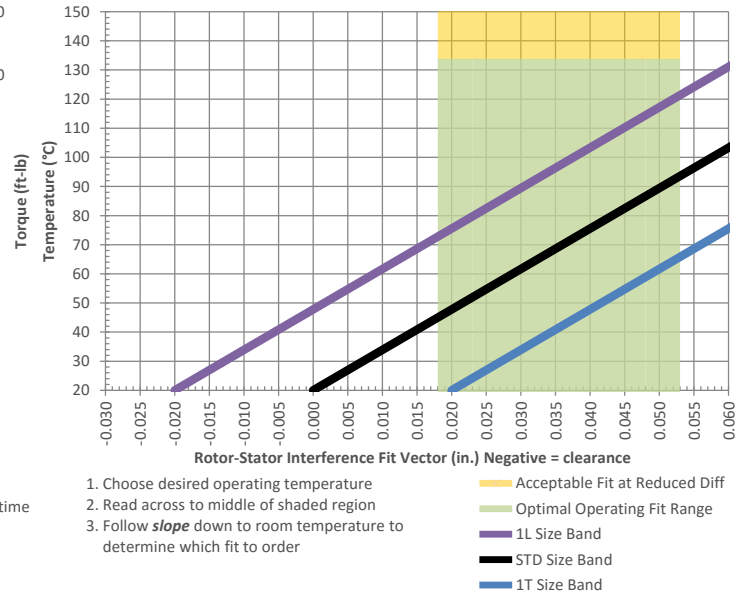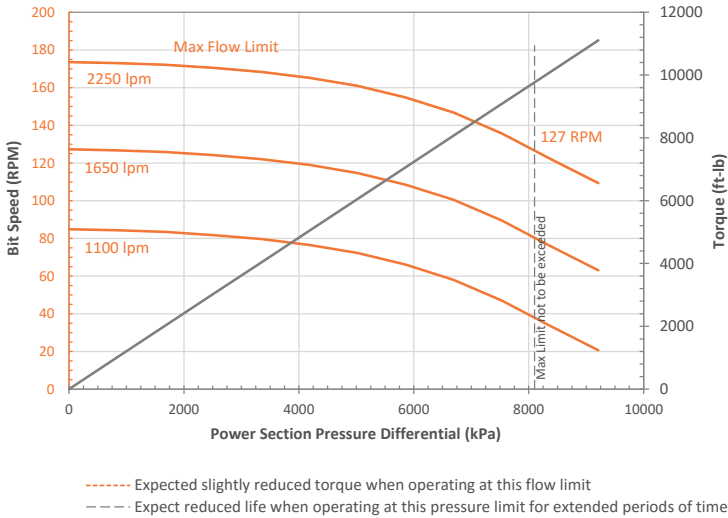

Performance curves are for reference only. Actual power section performance may vary depending on operating conditions (e.g. chosen rotor/stator interference fit, possible rubber swelling by drilling fluid, rotor and stator wear, actual downhole temperature, actual stator temperature, physical and chemical properties of the drilling fluid and other factors encountered downhole). The torque may exceed that specified for the connected components. Operating above the recommended limits may result in damage to the power section and connected components which will be the liability of the operator. Data subject to change without notice. Visit [www.spirasystems.com](http://www.spirasystems.com) for most up to date information.